

Nice
TT2Z K



Radio receiver

User, installation and safety instructions

www.niceforyou.com

Nice S.p.A.
Via Pezza Alta, 13
31046 Oderzo (TV), Italy
info@niceforyou.com



4.1.2 - Mode 1 procedure, to memorise the FIRST TRANSMITTER only (transmitter with PRG button)			
01.		If no transmitters are memorised, TT2Z K flashes 2 times	2
02.	7 sec		3


4.1.4 - Mode 1 procedure, to memorise an ADDITIONAL TRANSMITTER or a CLIMATE SENSOR (for transmitters without PRG button)			
01.	Wait at least 20 seconds from when the TT2Z K is switched on before initiating this procedure		
02.		10 sec	
03.		x 3	
04.		x 1	3

5.1.2 - Procedure for memorising a transmitter in Mode 2 (for transmitters without PRG button)			
01.	Wait at least 20 seconds from when the TT2Z K is switched on before initiating this procedure		
02.		10 sec	
03.		x 1	4
04.	In Table B, select the desired command		x N
N = number of button presses indicated in Table B, next to the selected command.			
05.		5 sec	3
? = a desired button, to be associated with the command selected in Table B.			

4.1.3 - Mode 1 procedure, to memorise an ADDITIONAL TRANSMITTER or a CLIMATE SENSOR (for transmitters with PRG button)			
01.	Wait at least 20 seconds from when the TT2Z K is switched on before initiating this procedure		
02.		5 sec	3 sec
03.		5 sec	
04.			

5.1.1 - Procedure for memorising a transmitter in Mode 2 (for transmitters with PRG button)			
01.	Wait at least 20 seconds from when the TT2Z K is switched on before initiating this procedure		
02.		5 sec	3 sec
03.		5 sec	
04.	In Table B, select the desired command		x N
N = number of button presses (and feedback quantity) indicated in Table B, next to the selected command.			
05.		5 sec	
? = a desired button, to be associated with the command selected in Table B.			

TABLE B – Commands available during memorisation of a transmitter button, in Mode 2.		
Command number	Number of button presses	Command that is memorised
No. 1	1 press	Open > Stop > Close > Stop > ...
No. 2	2 presses	Open > Stop > ...
No. 3	3 presses	Close > Stop > ...
No. 4	4 presses	Stop

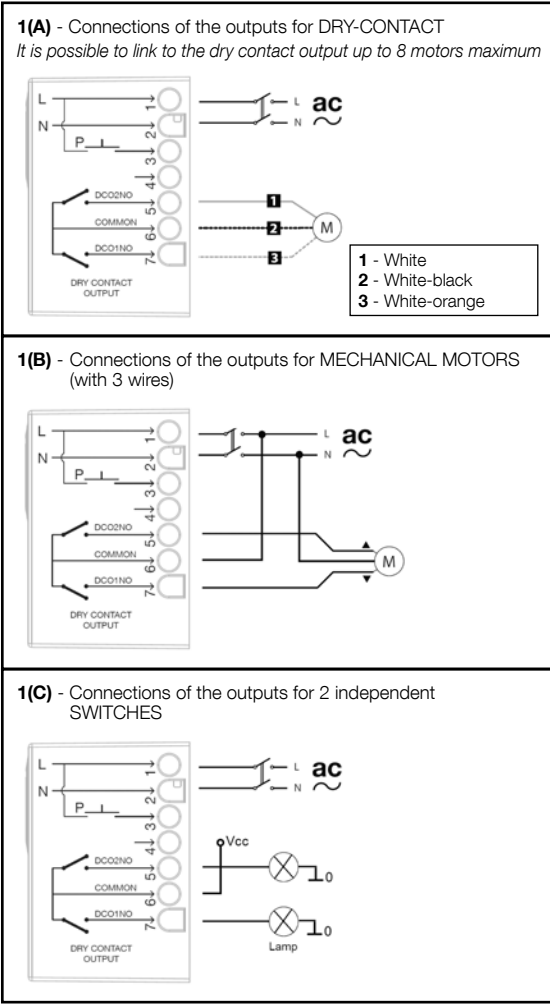

5.2.1 - Procedure for DELETING THE ENTIRE MEMORY of the TT2Z K device, using a memorised transmitter (with PRG button)		
01.	 x 1	 2 
02.	 x 1	 2 
03.	 x 1	 3 
04.	 x 1	 4 
05.	 x 1	 5 

5.2.2 - Procedure for DELETING THE ENTIRE MEMORY of the TT2Z K device, using a NON-memorised transmitter (with PRG button)			
01.	OFF (TT2Z K)	5 sec	ON (TT2Z K)
02.	within 10 seconds:		
		5 sec	
03.	OFF (TT2Z K)	5 sec	ON (TT2Z K)
04.	continue the procedure by completing all the steps of the procedure indicated in Paragraph 5.2.1		

TABLE A – Pairings that occur automatically between buttons and commands, during memorisation of transmitters in Mode 1, in relation to the type of device connected to the TT2Z K and the scheme used for this connection (1A, 1B or 1C).		
Motor connection modes	Transmitter button	Memorised command
Motor connected with "Dry Contact" (see scheme 1A)	▲	Command: UP
	■	Command: STOP
	▼	Command: DOWN
Motor connected with 3 wires plus the earth wire ("mechanical"-type motor) (see scheme 1B)	▲	Command: UP
	■	Command: STOP
	▼	Command: DOWN
Two independent "Switches" (see scheme 1C)	▲	Switching On / Off of SWITCH 1
	■	Switching off of SWITCH 1 and of SWITCH 2
	▼	Switching On / Off of SWITCH 2

