

CB 230 RTS

CONTROL SYSTEM FOR SWINGING GATE MOTORIZATION




For 230 V
motorization



Real-time indication of the product
operating status

General wiring diagram

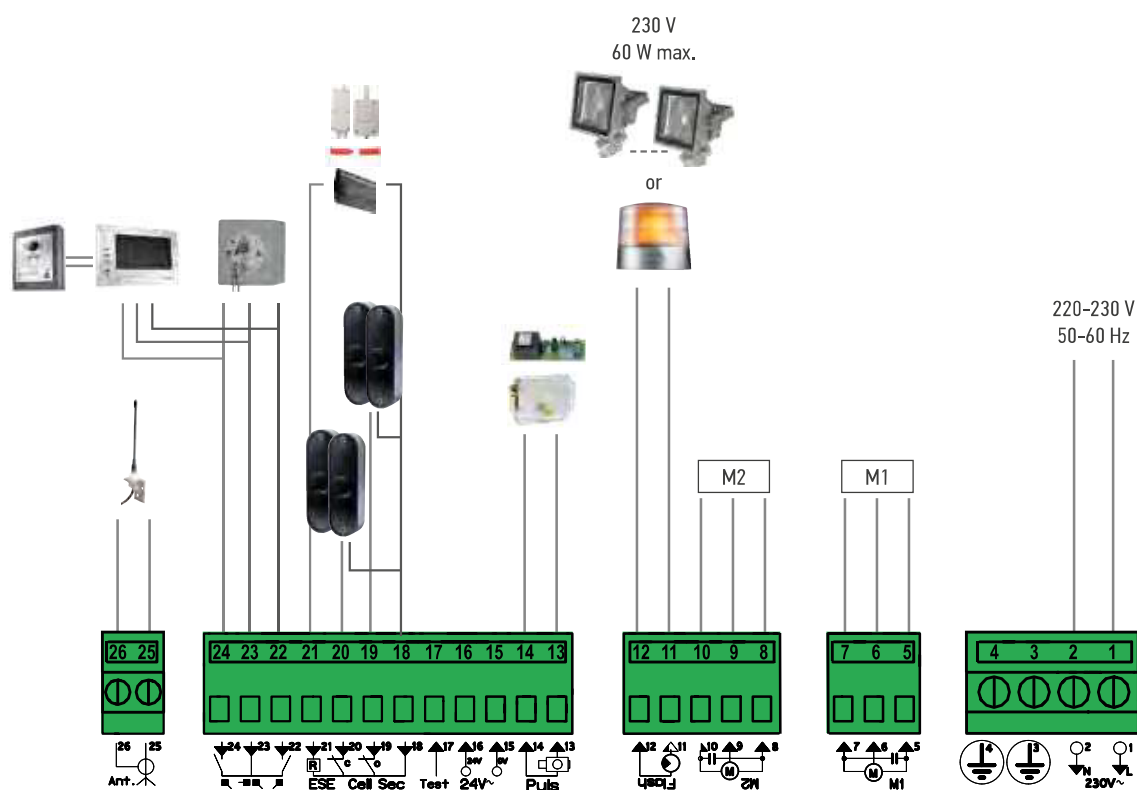

For effective control of 230V motors

Gate preserved

- Soft stop and adjustable torque

Easy setting

- One button to learn the gate course
- One button to program remote controls
- 12 switches for advanced settings

Customized and upgradable installation

- Wide range of comfort and security accessories

Easy connection of motors and accessories


- Extractible terminal blocks

Easy maintenance

- Immediate diagnosis: real-time indication of the product operating status



General overall size

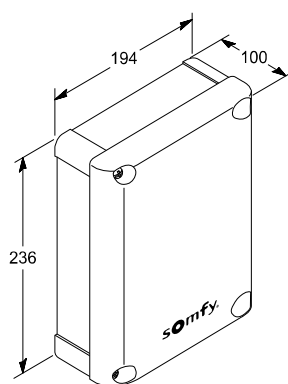

Technical characteristics

Mains power supply	220-230 V - 50/60 Hz
Maximum power consumption	210 W
Programming interface	2 buttons, 12 dipswitches, 1 trimmer, 7 LEDs
RTS radio frequency	433.42 MHz
Number of remote controls	128 channels maximum
Index of protection	IP 44
Operating temperature	-20°C to +60°C
Compatible motors	Ixengo L 230 V Ixengo JS 230 V