

Elixo 500 230 V RTS



Motorization for sliding gate

UP TO 8 M | 500 KG



Motor ground fixation



Reliable and hard-wearing
for sliding gates

■ Easy to install

- Easy access to ground fixation screws from the top.
- No adjustment needed from the installer.


■ Reliability and durability

- Mechanics and electronics based on 30 years of experience.
- Suitable for residential use and tested for 180,000 openings and closings.
- Long lifetime with soft stop at the end of travel.


■ Convenient to use

- Easy key unlocking from inside.

■ Standard installation:

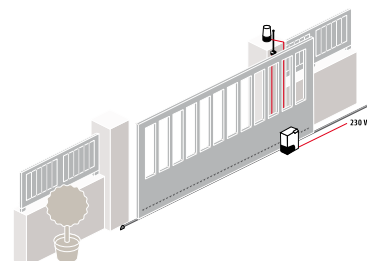

■ General overall size:

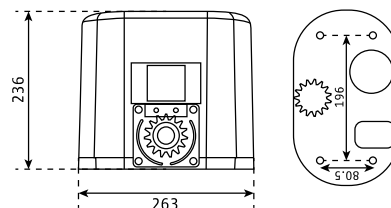

Technical characteristics

ELIXO 500 KIT STANDARD 230 V

| | |
|-----------------------------|-------------------------------|
| Power supply | 230 V - 50/60 Hz |
| Motor power supply | 230 V AC |
| Power consumption | 290 W |
| Capacitor | 10 µF (230 V) - 40 µF (110 V) |
| Motor revolutions | 1400 rpm |
| Maximum consumed current | 1.5 A (230 V) - 3 A (110 V) |
| Revolutions at output | 48 rpm |
| Number of storable channels | 36 |
| Operating time | 0 - 120 s |
| Gate speed | 8.5 m/min |
| Maximum torque | 20 Nm |
| Number of cycles/day | 100 |

Kit: ref. 1216368

| | | | |
|--|--------------------|---|------------------------------------|
| | | | |
| Elixo 500 230 V RTS + 2 Keygo | Amber light | Photocells Master Pro Bitech | RTS outdoor antenna 3 m |
| Ref. 1216367 | Ref. 9015034 | Ref. 1841155 | |

Accessories



**4 m of steel-reinforced
nylon rack**

Ref. 1841116