


SPEAKER CABLES

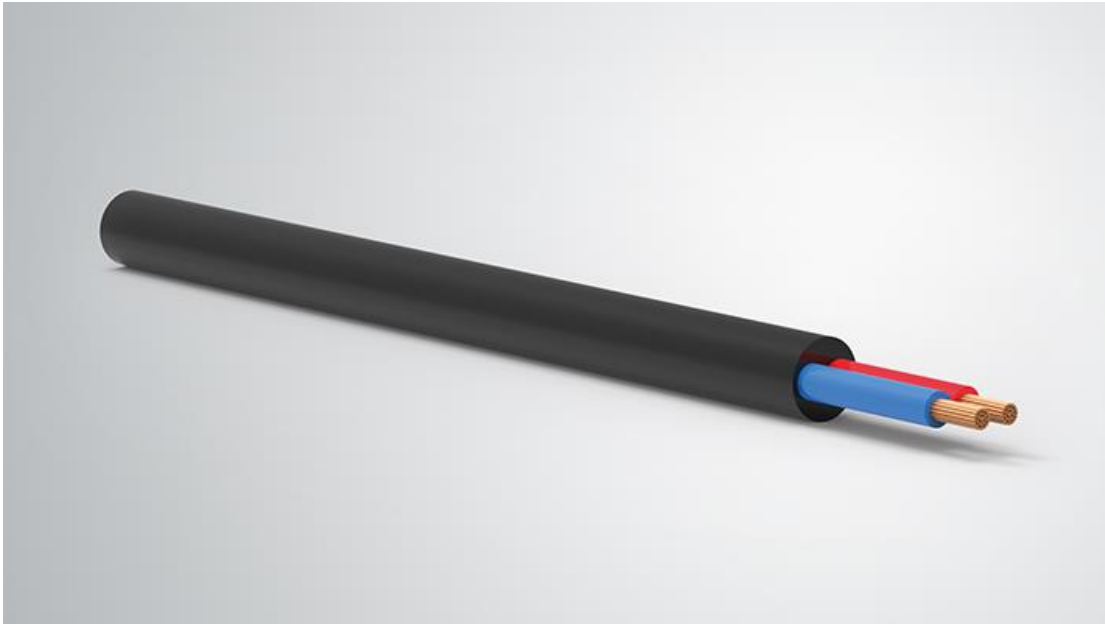

Cable construction

Inner Conductor	TS EN 60228 Class 6 Electrolytic – Stranded Annealed Copper
Insulation	Esnek PVC Kompaund
Insulation Colours	Blue, Red
Sheath	Flexible PVC Compound
Sheath Colours	Black, Grey
Standart Packing	100 – 500 – 1000 m

Electrical parameters

Insulation Resistance	>100 MOHM KM
Test Voltage	2000 V
Working Voltage	300 V
Working Tempeture	-30°C +70°C
Min. Bending Radius	5 x D

Graphic

Cross Section	Sheath Diameter (mm)	Cable Weight (kg/km)	App. Net Weight (kg/km)	Standard Packing
2 x 1,5 mm ²	7,20	26	80	100 / 500 / 1000
2 x 2,5 mm ²	8,00	45	96	100 / 500 / 1000
2 x 4,0 mm ²	9,60	72	145	100 / 500 / 1000