




MAS INTERCOM ANALOG PANEL

50xx- 60xx

DESCRIPTION

50xx and 60xx series outdoor panels are designed as doorbell panels for MAS video systems. 50xx series have 1 push button and 60xx series have 2 push buttons per row and the number of push buttons may be as many as required but after 12 buttons, the panel length becomes too long. This is not always compatible with the space available at the entrance of buildings and not aesthetic. After 12 buttons, MAS recommends to use “extension panels” with equal lengths.

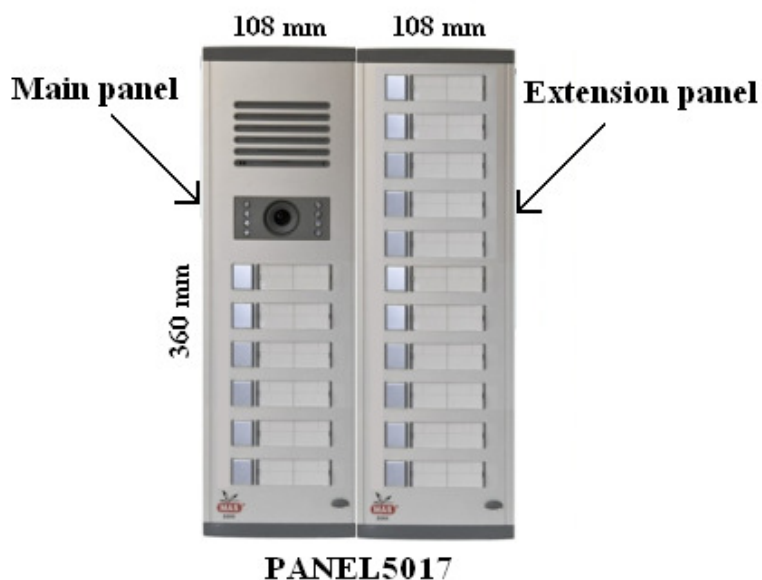

When these analog panels are used with video indoor units without handset (CUBE, DIAMOND, ELITE, SAFIR), a 10 K Ω resistor has to be inserted between **blue** and **black** terminals at back side of the panel.

PRODUCT SPECIFICATIONS

- Aluminum material with corrosion prevention.
- Easy connection and mounting.
- Pan & Tilt to adjust color camera within 32° of angle from its central position.
- Night view IR LEDs to enhance the image quality.
- High resolution camera: 350 TV lines
- As soon as you press a button, red LED feedback light indicates that doorbell is ringing.



- Operating Temperature : -20 ~ 55⁰C (-4 ~ 130 F)
- Operating Voltage : 16-24 VDC
- Approvals : CE,GOST-R /AB-28

CABLE INSERTION

At the back side of panels, one 0.22 mm² cable should be connected from each button to related apartment.

